

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication: 06.03.2002 Bulletin 2002/10 (51) Int Cl.7: G06F 1/00

(21) Application number: 01000389.5

(22) Date of filing: 20.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• BERGROTH, Ismo  
00200, Helsinki (FI)  
• HUOPIO, Simo  
00530, Helsinki (FI)  
• LAHTI, Pasi  
00510, Helsinki (FI)

(30) Priority: 31.08.2000 GB 0021281

(71) Applicant: F-Secure OYJ  
00180 Helsinki (FI)

(74) Representative: Lind, Robert  
Marks & Clerk, 4220 Nash Court, Oxford  
Business Park South  
Oxford OX4 2RU (GB)

(54) Software virus protection

(57) A method of protecting a wireless device against viruses, comprising maintaining a database of virus signatures on the device, updating the database

by downloading virus signatures in a Short Message Service (SMS) Message, and searching for virus signatures in the memory of or files stored on the wireless device by comparison with the database.

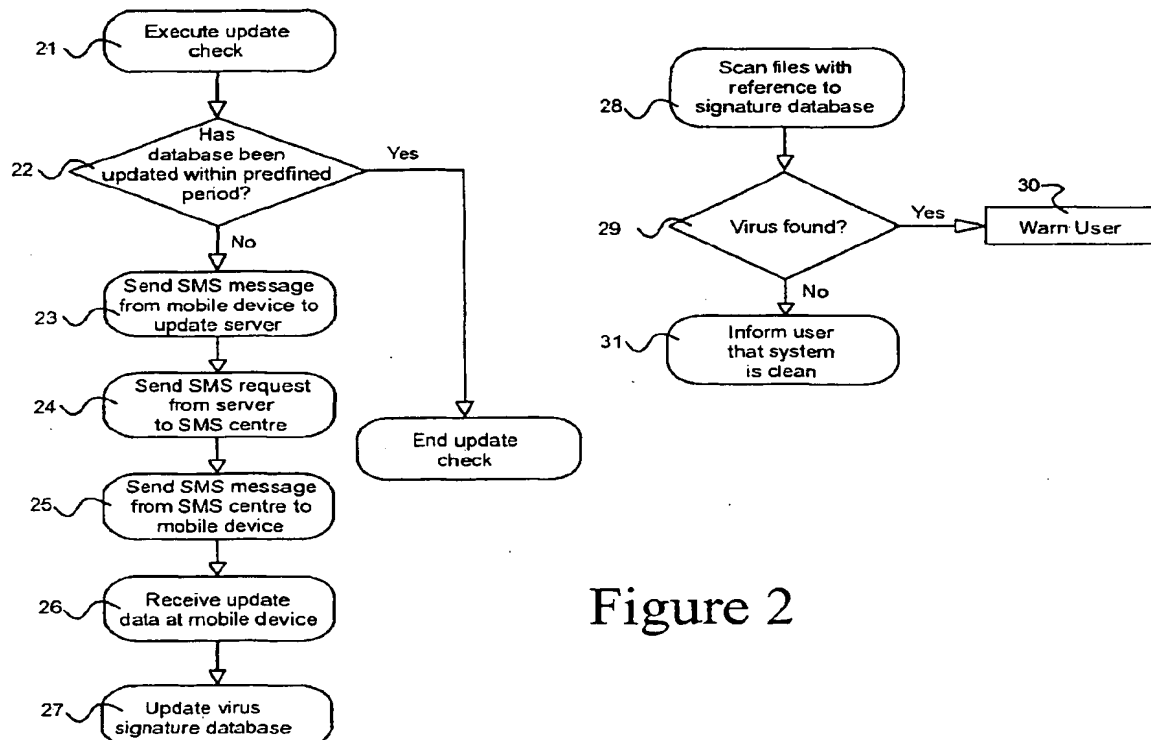


Figure 2

## Description

**[0001]** The present invention relates to software virus protection, and in particular to virus protection for wireless devices.

**[0002]** Viruses are a serious problem to users of computers. In order to combat the problem, there are a variety of anti-virus software products available which are able to identify viruses resident in the files or memory of a computer. Modern anti-virus software, such as for example F-Secure Anti-Virus for Windows NT, uses a virus signature comparison in order to identify viruses. Each virus contains code which can be analysed and recorded on a database. The database need not record all of the code contained in a virus if a unique "digital fingerprint" or signature can be recorded instead. This may be for example the overall pattern of the code, or two or three particular lines. When a signature comparison is made, the anti-virus program searches for viruses by scanning a file for the presence of a virus signature such as are present in the database.

**[0003]** Clearly, if effective protection is to be maintained, the database used by the anti-virus software must contain signatures for all known viruses. Unfortunately, new viruses are detected all the time, currently at the rate of one per day. Once a newly detected virus has been analysed by the anti-virus software provider and a signature created, the database must be updated on all of the computers which are using the anti-virus software. There have been various methods up until now for carrying out this update.

**[0004]** The earliest method used by virus software providers was to send a diskette through the mail to registered users of the anti-virus software, this diskette containing the required updates to the database. Another method has been to make the virus updates available on-line, so that they can be obtained by connecting to a remote server maintained by the anti-virus software provider. Updates have also been provided in the form of attachments to e-mail.

**[0005]** Increasingly, mobile phones are being used to connect to the Internet. Mobile Internet access is being facilitated by new networks (incorporating HSCSD and GPRS) as well as other protocols such as WAP. As mobile "platforms" with wireless modems and internet connections become more powerful, Internet connections will be as easy to obtain as for a desktop PC. This increase in the usage and capacity of mobile platforms renders them susceptible to attack by viruses. The methods outlined above for updating anti-virus software can also be used for mobile platforms. However, in general they will not be permanently connected to the Internet, and indeed may only connect to the Internet occasionally. This can lead to the signature database used by anti-virus software becoming out of date, rendering protection incomplete. Out of date protection can be worse than no protection at all, as it can engender a false sense of security in a user.

**[0006]** It is, therefore, an object of the present invention to provide a means for updating anti-virus signature databases on mobile platforms.

**[0007]** According to a first aspect, the present invention provides a method of updating a virus signature database used by anti-virus software operating on a mobile wireless platform, the method comprising sending update data via a signalling channel of a mobile telecommunications network to the mobile wireless platform.

**[0008]** The update data sent to the mobile wireless platform may be a virus signature database update, or may be a software update such as a software patch.

**[0009]** Preferably, the network is a GSM based network or an evolved GSM network such as GSM phase 2 (including GPRS) or UMTS (3GPP).

**[0010]** Preferably, the update data is obtained in one or more Short Message Service (SMS) messages. The SMS protocol, as set out for example in the ETSI GSM 03.40 specification, is a protocol which is well known and widely used for data transfer between mobile devices. For example, programs executing on top of the EP-OC operating system have access to SMS communications.

**[0011]** Alternatively, the update data may be carried by one or more Unstructured Supplementary Services Data (USSD) messages.

**[0012]** In order to prevent the update information from attack, the payload of the message carrying the update data is preferably cryptographically signed.

**[0013]** The mobile platform may be a mobile telephone, communicator, PDA, palmtop or laptop computer, or any other suitable platform.

**[0014]** The mobile platform may send a report to a management centre following the successful receipt and installation of the update data. More preferably, this is returned to a management centre using an SMS message.

**[0015]** In a preferred embodiment, the present invention provides a method of protecting a wireless device against viruses, comprising maintaining a database of virus signatures on the device, updating the database by receiving data containing virus signatures in one or more Short Message Service (SMS) or Unstructured Supplementary Services Data (USSD) messages, and searching for viruses contained in the database.

**[0016]** Some preferred embodiments of the invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram showing a system according to a preferred embodiment of the invention; and

Figure 2 is a flow diagram of a method of protecting a mobile device from attack by viruses according to a preferred embodiment of the present invention.

**[0017]** Figure 1 illustrates a UMTS Mobile Network

comprising a UMTS Terrestrial Radio Access Network (UTRAN) consisting of Base Stations (BS) 1 and Radio Network Controllers (RNCs) 2, and a core network consisting of MSCs (and SGSNs) 3 and a transmission network 4 (RNCs of the UTRAN may be supplemented with BSCs to facilitate interworking with the GSM standard). Also present in the core network are a Short Message Service (SMS) centre 5 and a GPRS Gateway Support Node (GGSN) 6. For the sake of simplicity, Figure 1 shows only a single RNC 2 and MSC (SGSN) 3. It will be appreciated that further nodes will be present in a UMTS network in practice.

**[0018]** A mobile wireless device 7 can connect to other telecommunication devices (e.g. mobile telephones, fixed line telephones, etc) via the UTRAN and the core network (of course other networks including "foreign" mobile networks and PSTN networks may be involved in such connections). Using the GGSN 6, the device 7 is able to connect to the Internet 8. A user of the mobile wireless device 1 may thus contact for example a remote web server 9 by entering the URL of the web server into his device's Internet browser. The mobile device 1 may also communicate with a bluetooth device 10 and a Local Area Network (LAN) 11. By way of example, the mobile device 1 may use the EPOCH™ operating system.

**[0019]** In view of the risk that viruses could be downloaded from another mobile device, from the remote server 9 via the Internet 8, from the bluetooth device 10, or from another node of the LAN 11, the device 1 is provided with an anti-virus software application which may check any files downloaded from an external source, together with files already resident on the device's system. As explained above, this software searches files for virus "signatures" so that, in order to be fully effective, it requires its database of virus signatures to be updated regularly.

**[0020]** There are various known methods for obtaining updates to a database of virus signatures. One method is to periodically receive media (e.g. floppy disks, compact discs) with the updates recorded thereon. However, this is a cumbersome and expensive method and will result in fewer updates being made, with the database never being fully up to date. A better method is for the user of the mobile device to contact a remote web server operated by the provider of the anti-virus software. The necessary data to update the anti-virus database can then be downloaded from that server. As explained above however, very few mobile devices are permanently connected to the Internet, and in many cases users will only connect to the Internet infrequently. This method also relies on the user remembering to connect to the remote anti-virus server periodically in order to obtain the update data. Thus there will again be periods of time during which the database is not fully up to date.

**[0021]** In order to overcome these problems use may be made of the SMS centre 5 within the UMTS core network. SMS is a service provided by current GSM net-

works for sending short messages over a signalling channel, and is expected to be provided also by UMTS networks.

**[0022]** The SMS centre 5 is located in the core network part of the UMTS network and is coupled to the Internet 8 via an anti-virus server 12 which is operated and controlled by the UMTS network operator. The anti-virus server 12 receives regular updates (e.g. every morning) from an update server 13 maintained by the anti-virus software provider. The SMS server 12 maintains a record of all subscribers to the anti-virus service in a database 13, and initiates virus signature database updates by sending a Short Message Service (SMS) request for each of the registered subscribers (including the user of the mobile device 1) to the SMS centre 5. Upon receipt of a request, the SMS centre 5 generates a corresponding SMS message and send this to the destination mobile device via the Mobile Switching Centre 3 of the core network and the UTRAN. The SMS message contains virus signature data enabling the mobile device 1 to update the anti-virus database to include signatures for those viruses discovered since the last update was made.

**[0023]** As SMS messages can carry only relatively small quantities of information, it may be necessary for the SMS centre 5 to send a "concatenated message", (i.e. several SMS messages) to convey all the necessary information to perform a database update. For the same reason it is desirable to be able to reduce the volume of information sent as part of a virus signature database upgrade. Thus, whilst SMS updates may be sent automatically to all subscribers from the network, it is preferable to send an SMS message to the server 12 from a device 1 (via the SMS centre 5), containing details of which virus signatures are currently stored in the device's signature database. On receipt of such an SMS request, the anti-virus server 12 needs only to issue an SMS request to the SMS centre 5 containing virus signatures not currently on the signature database of the mobile device 1.

**[0024]** As noted in the preceding paragraph, SMS updates may be sent automatically from the network to subscribers, or may be triggered by requests from subscribers. Figure 2 is a flow diagram illustrating the sequence of steps involved in a subscriber initiated updating process. The mobile device executes the anti-virus software 21. This is usually done when the device is switched on. The anti-virus software, which uses a database of virus signatures, checks to determine when the database was last updated 22. If the last update took place more than a pre-defined period ago, e.g. one week, the software causes the device to send an SMS message 23 to the server anti-virus 12 via the SMS centre 5. This message contains data regarding the current status of the database.

**[0025]** In reply to this SMS message, the anti-virus server 12 returns an SMS request 24 (or several SMS messages forming a "concatenated message") to the

SMS centre 5, the request containing signatures for viruses discovered and analysed since the previous update. The SMS centre 5 generates a corresponding SMS message 25 and sends this to the mobile device 1, which receives the message 26 and causes the new signature(s) to be incorporated into the anti-virus signature database for future use 27.

**[0026]** When next requested, or otherwise triggered (e.g. by a scanning scheduler), the anti-virus software scans the files and memory of the mobile device in order to determine the presence of any of the virus signatures in its database 28. If an infected file is discovered 29, the user is warned 30 and given an opportunity to delete or clean that file. Otherwise, once all files have been scanned, the software informs the user that his system is "clean" 31.

**[0027]** It will be appreciated that there are other embodiments which fall within the scope of the invention. For example, the method of the present invention may be used to update the anti-virus software itself, e.g. by sending software patches.

#### Claims

1. A method of updating a virus signature database used by anti-virus software operating on a mobile wireless platform, comprising sending update data via a signalling channel of a mobile telecommunications network to the mobile wireless platform.
2. A method according to claim 1, wherein the update data sent to the mobile wireless platform is a virus signature database update.
3. A method as claimed in claim 1 or 2, wherein the network is GSM or enhanced GSM network.
4. A method as claimed in claim 3, wherein the update data is carried by one or more Short Message Service (SMS) messages.
5. A method as claimed in claim 1, 2 or 3, wherein the update data is carried by one or more Unstructured Supplementary Services Data (USSD) message.
6. A method as claimed in any preceding claim, wherein the message carrying the update data is cryptographically signed.
7. A method as claimed in any preceding claim, wherein the mobile platform comprises a mobile telephone, communicator, PDA, palmtop or laptop computer.
8. A method as claimed in any preceding claim, and comprising sending the update data in response to a request from the mobile platform.
9. A method as claimed in claim 8, wherein said request identifies the current status of a virus signature database.
10. A method of protecting a wireless device against viruses, comprising:
  - maintaining a database of virus signatures on the device;
  - updating the database by receiving data containing virus signatures in one or more Short Message Service (SMS) or Unstructured Supplementary Services Data (USSD) messages; and
  - searching for virus signatures contained in the database.

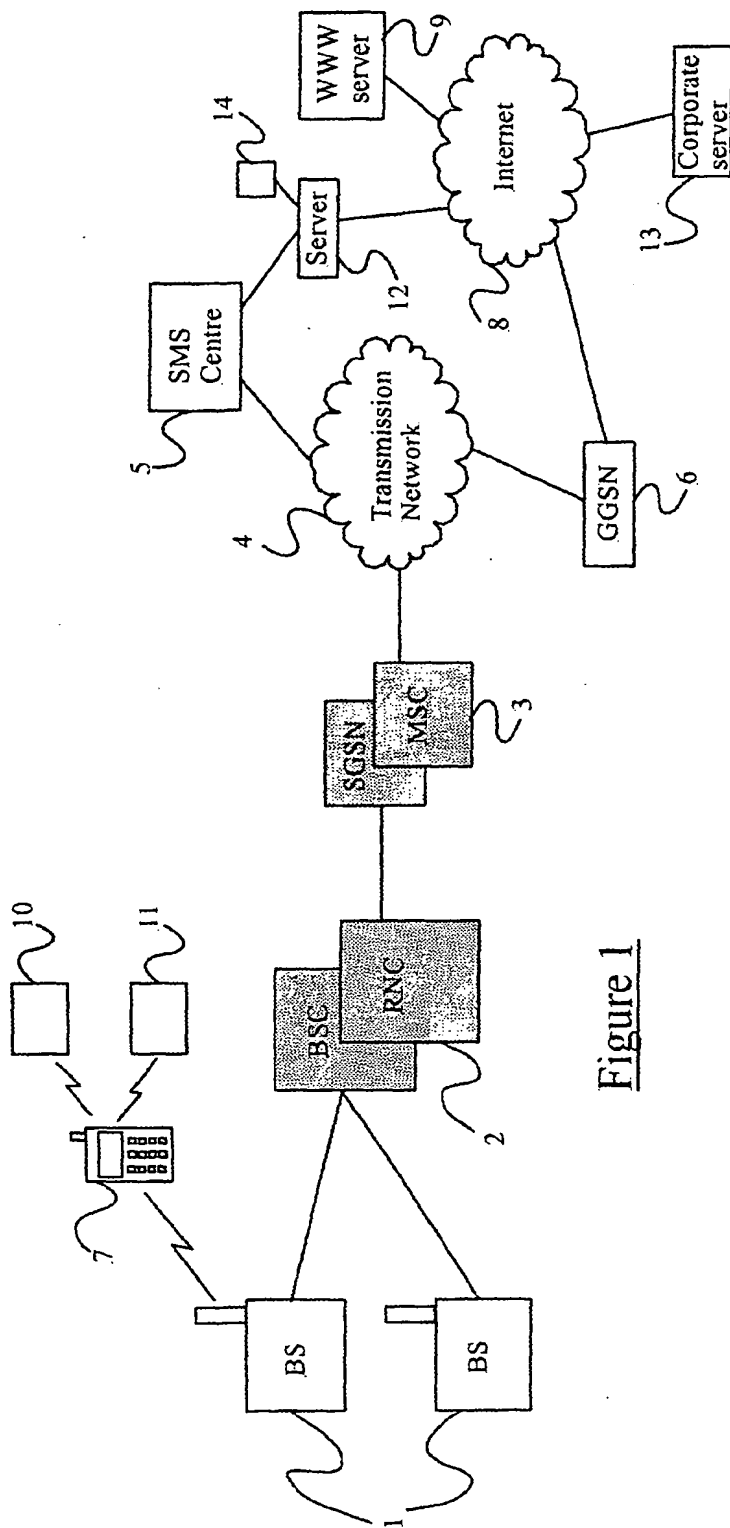


Figure 1


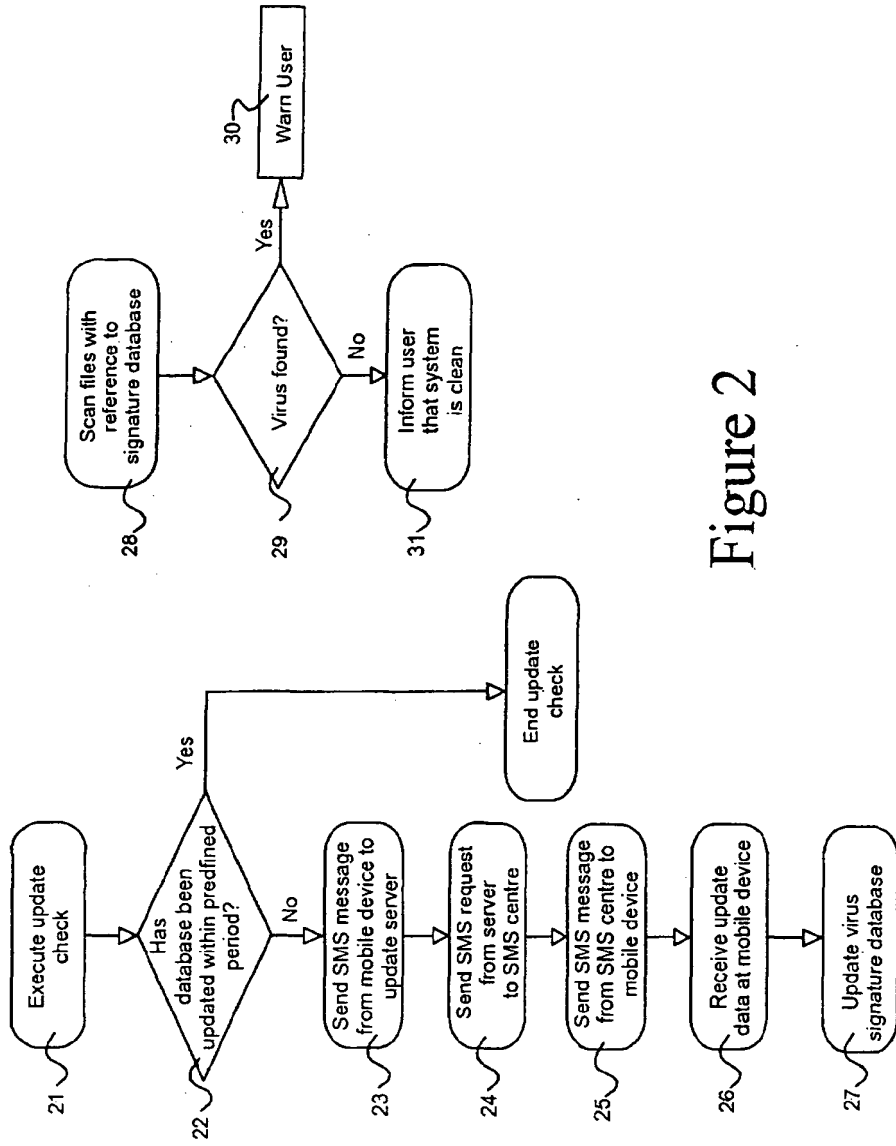


Figure 2



(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
05.02.2003 Bulletin 2003/06

(51) Int Cl.7: G06F 1/00

(43) Date of publication A2:  
06.03.2002 Bulletin 2002/10

(21) Application number: 01000389.5

(22) Date of filing: 20.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

- HUOPIO, Simo  
00530, Helsinki (FI)
- LAHTI, Pasi  
00510, Helsinki (FI)

(30) Priority: 31.08.2000 GB 0021281

(74) Representative: Lind, Robert  
Marks & Clerk,  
4220 Nash Court,  
Oxford Business Park South  
Oxford OX4 2RU (GB)

(71) Applicant: F-Secure OYJ  
00180 Helsinki (FI)

(72) Inventors:  
• BERGROTH, Ismo  
00200, Helsinki (FI)

(54) Software virus protection

(57) A method of protecting a wireless device against viruses, comprising maintaining a database of virus signatures on the device, updating the database

by downloading virus signatures in a Short Message Service (SMS) Message, and searching for virus signatures in the memory of or files stored on the wireless device by comparison with the database.

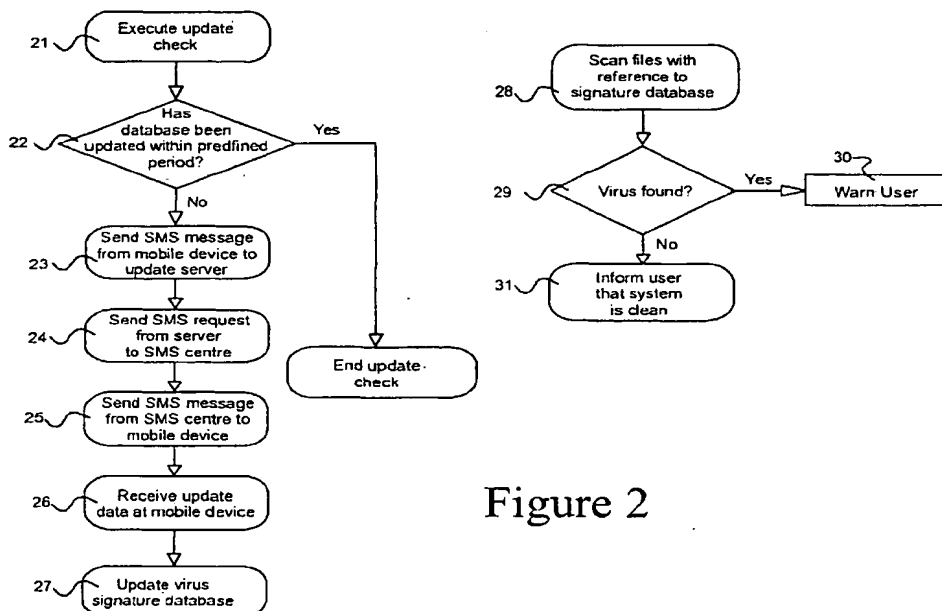


Figure 2

EP 1 184 772 A3



European Patent Office

EUROPEAN SEARCH REPORT

Application Number  
EP 01 00 0389

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	F-SECURE: "F-Secure Announces World's First Anti-Virus Product" INTERNET ARTICLE, [Online] 15 August 2000 (2000-08-15), pages 1-2, XP002220984 Retrieved from the Internet: <URL:http://web.archive.org/web/20000815200352/http://www.europe.f-secure.com/news/2000/news_2000080900.html> [retrieved on 2002-11-13] * paragraphs [0002],[0007] *	1-10	G06F1/00
Y	ATKINSON T: "F-Secure Products: Installation Guidelines & Advice (Version 2.0)" INTERNET ARTICLE, [Online] 8 August 2000 (2000-08-08), pages 1-29, XP002220985 Retrieved from the Internet: <URL:http://www.opensystems.com.au/Downloads/SalesMaterial/FSecure/F-Secure%20Installation%20Guide.pdf> [retrieved on 2002-11-14] * page 4, paragraphs 6,7 * * page 5, paragraphs 3,5 * * page 6, paragraph 3 * * page 7, paragraphs 1-4 *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  G06F H04L
Y	EP 0 772 367 A (SIEMENS AG) 7 May 1997 (1997-05-07) * column 1, line 51 - column 2, line 16 * * column 3, line 26-28 *	1-10	
Y	EP 0 811 942 A (CYBER MEDIA INC) 10 December 1997 (1997-12-10) * page 3, line 52,53 * * page 12, line 5-10 *	6	
-/--			
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>22 November 2002</b>	Examiner <b>Meis, M</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC FORM 1502 (03/03) (EP 04081)





European Patent  
Office

EUROPEAN SEARCH REPORT

Application Number  
EP 01 00 0389

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 99 15966 A (SYMANTEC CORP) 1 April 1999 (1999-04-01) * page 1, line 12-24 *	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
MUNICH	22 November 2002	Meis, M	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP 01 00 0389 A3

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 00 0389

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-11-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0772367 A	07-05-1997	CN 1152246 A	18-06-1997
		EP 0772367 A2	07-05-1997
EP 0811942 A	10-12-1997	US 6151643 A	21-11-2000
		AU 2477797 A	11-12-1997
		CA 2207162 A1	07-12-1997
		EP 0811942 A2	10-12-1997
		JP 10091407 A	10-04-1998
		US 6457076 B1	24-09-2002
WO 9915966 A	01-04-1999	US 6357008 B1	12-03-2002
		CA 2304163 A1	01-04-1999
		DE 69802831 D1	17-01-2002
		DE 69802831 T2	25-04-2002
		EP 1018077 A1	12-07-2000
		WO 9915966 A1	01-04-1999

EPOFORM 6489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82